

FILTERS, FILTER & MAINTENANCE KITS

Protect your investment with Bobcat quality filters that are specifically designed to provide the most sophisticated protection



FILTER & MAINTENANCE KITS

When you depend on performance and reliability, count on Bobcat filter kits to deliver superior results in all job conditions.

- ▶ GREAT WAY TO SAVE TIME AND COSTS WHEN IT'S TIME FOR MACHINE MAINTENANCE – FILTER KITS OFFER PRICE ADVANTAGE COMPARED TO ORDERING FILTERS INDIVIDUALLY.
- ▶ SIMPLER AND FASTER ORDERING PROCESS – ALL YOU NEED IN 1 BOX.
- ▶ TESTED AND PROVEN SUPERIOR BOBCAT QUALITY FILTERS PROTECT YOUR INVESTMENT AND REDUCE COSTLY DOWNTIME.



BOBCAT GENUINE FILTERS VERSUS LOCAL SOURCE FILTERS

HYDRAULIC OIL FILTER



BOBCAT FILTER

Cellulose media 10 micron © > 2
Media area: 0.2046 m²

Protects your engine against particles up to 3 times smaller

COMPETITIVE FILTERS*

Cellulose media 30 micron © > 2
Media area: 0.183 m²

FUEL FILTER



Cellulose media 3 micron © > 2
Media area: 0.113 m²

Higher efficiency with longer life.

Efficient and easy to use draining system.

Cellulose media 10 micron © > 2
Media area: 0.113 m²

AIR FILTERS (OUTER AND INNER)



Bobcat filter has 1/3 more life.

Up to 50% more efficiency at 20 and 50 mbar on inner element.

Bobcat higher efficiency filters can reduce up to 30 times dust contamination!

Cellulose media 10 micron © > 2
Media area: 0.113 m²

ENGINE OIL FILTER



Beta 2 nominal: 4μ Beta 75 absolute: about half from local sources.
Media: Synthetic

Synthetic media has a greater efficiency with a lower pressure drop and thus longer life

Beta 2 nominal: 10μ

Beta 75 absolute: about twice Bobcat specs.
Media: Cellulose

TIP

LEARN MORE ABOUT FILTERS

Enroll into our e-learning course dedicated to filters explaining common filtration myths and suggesting how to address them. [Visit our E-learning center.](#)

FILTERING OUT THE DIFFERENCE

	BOBCAT FILTER	COMPETITIVE FILTERS*
CANISTER ASSEMBLY	 <p>Thicker metal housing for superior durability and reliability.</p>	 <p>Thinner metal housing is more susceptible to dents and failing under pressure.</p>
INTERNAL SPRING	 <p>The spring insures an optimum sealing between cartridge and baffleplate and reduces the negative impact of vibrations.</p>	 <p>Internal spring can be weaker, and more vulnerable to breakage. A weaker spring does not hold the cartridge as tightly in place.</p>
FILTER MEDIA	 <p>Filter media is uniformly pleated and spaced for maximum filtration surface area. Thicker media ensures the right balance of filter efficiency, capacity, and pressure drop to meet Bobcat Engineering standards. Filter media is uniformly cured to improve strength.</p>	 <p>Inconsistent and fewer media pleats reduce the filtration product life. Competitors may use a thinner media which limits holding capacity. Filters with lower micron ratings will not capture contaminants as effectively and may damage equipment.</p>
INTERNAL BYPASSING	 <p>The bypass valve guarantees the oil supply to your engine in all circumstances. You better get dirty oil in your engine than no oil! The bypass needs to be well designed so it only opens when necessary. We don't want oil to bypass the filter in normal conditions.</p>	 <p>Bypass valve may not fasten tightly and can leak oil into the system without passing through the filter media. Some brands may lack pressure bypass valves.</p>
SEAL	 <p>Wide one-piece seal provides maximum coverage area to protect against leaks.</p>	 <p>Seals may pull double duty as a bypass, or be made of more than one-piece creating the opportunity for leaks.</p>
MEDIA CONSTRUCTION	 <p>Filter media is deeply embedded in plasitisol with metal end caps that wrap around to hold and seal media securely. Louvered inner liner allows maximum flow and minimum restriction.</p>	 <p>Some competitive brands use glue to adhere media to paper end caps without a ledge, making the filter susceptible to moisture and leakage. Limited inner liner flow area can cause restriction.</p>
INLETS	 <p>Greater number of large inlet holes enables better flow through the Bobcat filter. Spin-on Bobcat filters have deep thread engagements for a secure fit.</p>	 <p>Smaller, and fewer, inlet holes may restrict flow causing pressure fluctuations. Less thread engagement may cause the filter to be easily stripped off, or allow leaks to occur.</p>

* Note: The outer canisters of competitive filters have been digitally altered to remove brand information. Internal construction may vary by manufacturer and type of filter. Illustrations not to scale. Bobcat reserves the right to make changes to product specifications and design without notice.

MICRON PARTICLE SIZE COMPARISON

CROSS SECTION OF A HUMAN HAIR
70 MICRONS
1 micron = .000039 inches

DIESEL SOOT
0.01 – 0.1 MICRONS

COAL DUST
5 MICRONS


BACTERIA
2 MICRONS

TALCUM POWDER
10 MICRONS

HOW DO MICRON RATINGS RELATE TO FILTERS?

Micron ratings are assigned to filters to indicate the filter's ability to capture certain sizes of particles. Because filter media can vary, so can the capability to capture harmful contaminants.

It is crucial that systems are correctly matched with specific micron-rated filters to ensure dangerous contaminants are captured.

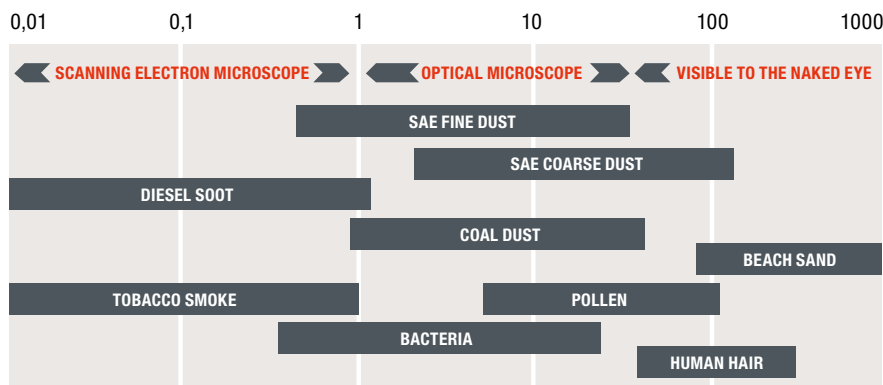

TIPS


TIPS FOR HANDLING AND STORING BOBCAT FILTERS

Whether you are storing filters in your shop or warehouse, it's always important to practice good storage and handling techniques. Here are a few tips to keep your filters in good condition:

- Make sure the filter is clean, unused and free of damage before selling or installing.
- Never store a filter without it being in a box or completely sealed.
- To prevent damage to filters, don't throw in the back of a truck, or in any other area where damage could occur.
- Be sure to keep filters in original packaging if storing on metal shelves. Over time, this will help to prevent rusting.
- Make sure labels with product information and dates are visible to all personnel pulling from shelves.

SEE THE DIFFERENCE!

Memorize these 6 features & benefits to show customers the importance of a quality filter.

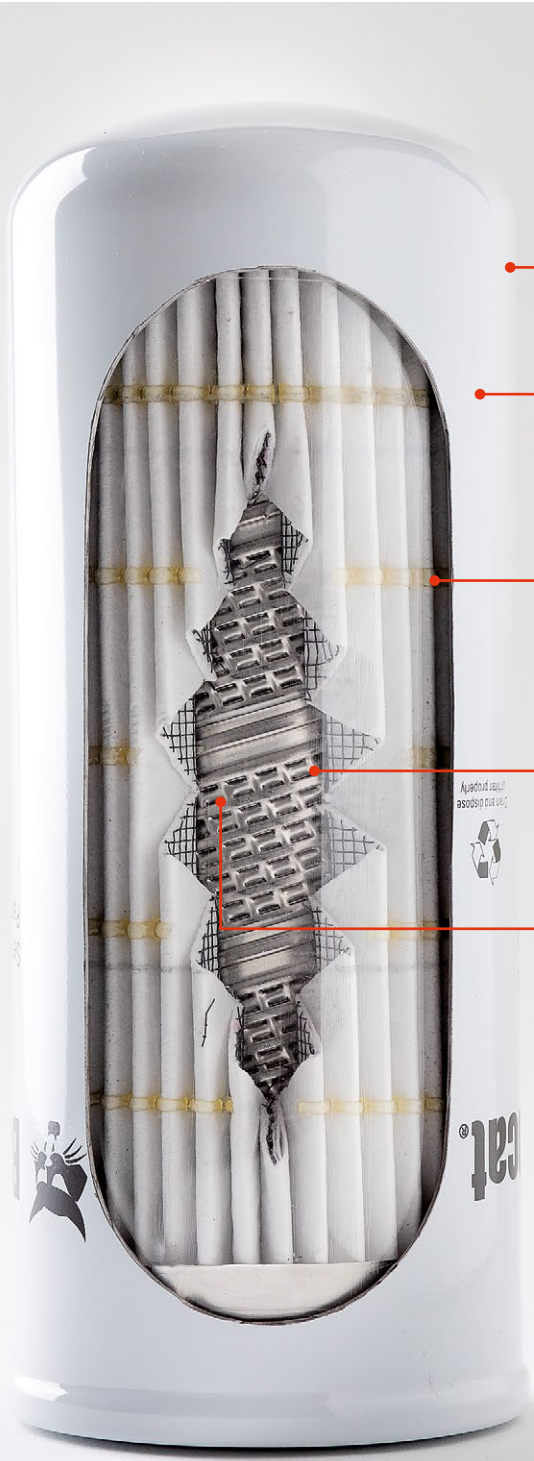

Spin-on design

Provides easy servicing and reduces risk of contamination to the hydraulic system during filter service.

Heavy-duty metal housing

Provides superior durability and protection.

Synthetic filter media

High performance media protects your machine from contaminants and extends service life.

Pleated media

Pleats maximize filter surface area for more contaminant holding capacity and longer filter life.

Spiral center tube

Allows more flow area with higher collapse strength.

Hot melt spacing and wire backing

Maintains pleat separation and allows optimum filter media use, even during cold start-up and flow fluctuations.



FILTER & MAINTENANCE KITS



- Filter & Maintenance Kits are a great way to save time and costs when it's time for machine maintenance.
- Simpler and faster selection and ordering process – all you need in 1 box.
- Are you leaving the workshop for a regular machine maintenance in the field? Take corresponding Bobcat maintenance kits with you and have all the regular parts needed at hand.
- Filter kits contain all filters used on the machine. Maintenance kits contain selected parts needed for 250 hr, 500 hr and 1000 hr service intervals.



FOR LOADERS

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR LOADERS		
					250 HR	500 HR	1000 HR
MT55	B38U-11001	Air Filter Engine Inner	6687263	1			1
		Air Filter Engine Outer	6687262	1			1
		Engine Oil filter	6671057	1	1	1	1
		Fuel Filter with Watter Seperator	6667352	1	1	1	1
		Hydraulic Filter Main	6677652	1		1	1
		Belt – Alternator	6686683				1
		Belt – Drive	6684749				1
		Radiator Cap	6646678				1
KIT PART NUMBER				7416302	7406303	7416304	7416305
S70	B38V-11001 B38W-11001	Air Filter Engine Inner	6672468	1			1
		Air Filter Engine Outer	6672467	1			1
		Engine Oil filter	6657635	1	1	1	1
		Fuel Filter with Watter Seperator	6667352	1	1	1	1
		Hydraulic Filter Main	6677652	1		1	1
		Belt – Alternator	6571857				1
		Belt – Drive	6690471				1
		Hydraulic Reservoir Breather Cap	7025626			1	1
KIT PART NUMBER				6901513A	7416153	7416306	7416307
S100	A8ET-11001 B4KH-11001	Air Filter Engine Inner	7020361	1			1
		Air Filter Engine Outer	6690907	1			1
		Engine Oil filter	6657635	1	1	1	1
		Fuel Filter with Watter Seperator	6667352	1	1	1	1
		Fuel Prefilter	6683101	1			1
		Hydraulic Filter Main	6661248	1		1	1
		Hydraulic Case Drain filter	6661022	1			1
		Hydraulic Charge Filter	6681012	1		1	1
		Belt – Alternator	6690143				1
		Belt – Drive	7248735				1
		Hydraulic Reservoir Breather Cap	6727475			1	1
		KIT PART NUMBER				7416308	7416153

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR LOADERS			
					250 HR	500 HR	1000 HR	
S450	AV9V-11001 B1E6-11001	Air Filter Engine Inner	6666376	1			1	
		Air Filter Engine Outer	6666375	1			1	
		Air Filter Cabin	7176099				2	
		Engine Oil filter	6675517	1	1	1	1	
		Fuel Filter with Watter Seperator	6667352	1	1	1	1	
		Fuel Prefilter	6683101	1	1	1	1	
		Hydraulic Filter Main	7414581	1			1	
		Hydraulic Charge Filter	7319444	1		1	1	
		Belt – A/C	7237345				1	
		Belt – Alternator	7100104				1	
		Belt – Drive	7349400				1	
		Hydraulic Oil Filter Canyster Cover	7349796				1	
		Hydraulic Reservoir Breather Cap	6727475			1	1	
		KIT PART NUMBER			6987864	7416311	7416312	7416313
S450 T450	B4J7-11001 B4J6-11001	Air Filter Engine Inner	7221934	1			1	
		Air Filter Engine Outer	7286322	1			1	
		Air Filter Cabin	7176099				2	
		Engine oil filter	7343102	1		1	1	
		Fuel Filter	7336334	1		1	1	
		Fuel Prefilter	7348032	1			1	
		Hydraulic Filter Main	7414581	1			1	
		Hydraulic Charge Filter	7319444			1	1	
		Belt – A/C	7237345				1	
		Belt – Alternator	7339263				1	
		Belt – Drive	7349400				1	
		Hydraulic Oil Filter Canyster Cover	7349796				1	
		Hydraulic Reservoir Breather Cap	6727475			1	1	
		KIT PART NUMBER			7416314		7416315	7416316
T450	B1EM-11001	Air Filter Engine Inner	7221934	1			1	
		Air Filter Engine Outer	7286322	1			1	
		Air Filter Cabin	7176099				2	
		Engine Oil filter	7012303	1		1	1	
		Fuel Filter	7023589	1		1	1	
		Hydraulic Filter Main	7414581	1			1	
		Hydraulic Charge Filter	7319444			1	1	
		Belt – A/C	7237345				1	
		Belt – Alternator	7177784				1	
		Belt – Drive	7349400				1	
		Hydraulic Oil Filter Canyster Cover	7349796				1	
		Hydraulic Reservoir Breather Cap	6727475			1	1	
		KIT PART NUMBER			7416317		7416329	7416319

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR LOADERS		
					250 HR	500 HR	1000 HR
S510	AZN4-11001 AZN5-11001	Air Filter Engine Inner	6666334	1			1
		Air Filter Engine Outer	6666333	1			1
		Air Filter Cabin	7176099				2
		Engine Oil filter	6675517	1	1	1	1
		Fuel Filter with Watter Seperator	6667352	1	1	1	1
S530	AZN6-11001 AZN7-11001	Hydraulic Filter Main	7414581	1			1
		Hydraulic Charge Filter	7319444			1	1
		Belt – Alternator	7100104				1
		Belt – Drive	7146391				1
		Hydraulic Oil Filter Canyster Cover	7349796				1
		Hydraulic Reservoir Breather Cap	6727475			1	1
		KIT PART NUMBER		7416320	7416321	7416322	7416323
S510	B4JB-11001	Air Filter Engine Inner	7221934	1			1
		Air Filter Engine Outer	7286322	1			1
		Air Filter Cabin	7176099				2
		Engine oil filter	7343102	1		1	1
		Fuel Filter	7336334	1		1	1
S530	B4KA-11001	Fuel Prefilter	7348032	1			1
		Hydraulic Filter Main	7414581	1			1
S550	B4ZD-11001	Hydraulic Charge Filter	7319444			1	1
S590	B4ZE-11001	Belt – A/C	7260234				1
T590	B4KV-11001	Belt – Alternator	7339263				1
		Belt – Drive	7257359				1
		Hydraulic Oil Filter Canyster Cover	7349796				1
		Hydraulic Reservoir Breather Cap	6727475			1	1
				KIT PART NUMBER		7416314	
S550	AZN8-11001	Air Filter Engine Inner	6666376	1			1
		Air Filter Engine Outer	6666375	1			1
		Air Filter Cabin	7176099				2
		Engine Oil filter	6675517	1	1	1	1
		Fuel Filter with Watter Seperator	6667352	1	1	1	1
S570	AZNB-11001	Hydraulic Filter Main	7414581	1			1
S590	AZND-11001	Hydraulic Charge Filter	7319444			1	1
		Belt – A/C	6625298				1
T590	B3ZA-11001	Belt – Alternator	7143498				1
		Belt – Drive	7146391				1
		Hydraulic Oil Filter Canyster Cover	7349796				1
		Hydraulic Reservoir Breather Cap	6727475			1	1
				KIT PART NUMBER		7416326	7416321

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR LOADERS		
					250 HR	500 HR	1000 HR
S550	B3GY-11001	Air Filter Engine Inner	7221934	1			1
		Air Filter Engine Outer	7286322	1			1
		Air Filter Cabin	7176099				2
		Engine Oil filter	7012303	1	1	1	
S570	B3GZ-11001	Fuel Filter	7023589	1	1	1	1
		Hydraulic Filter Main	7414581	1			1
S590	B3H1-11001	Hydraulic Charge Filter	7319444		1	1	
		Belt – A/C	7178328				1
T590	B3Z7-11001	Belt – Alternator	7177784				1
		Belt – Drive	7257359				1
		Hydraulic Oil Filter Canyster Cover	7349796				1
		Hydraulic Reservoir Breather Cap	6727475		1	1	
		KIT PART NUMBER			7416317		7416329



MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR LOADERS								
					250 HR	500 HR		1000 HR					
S630	A3NT-11001 A3NU-11001 B4SY-11001	Air Filter Engine Inner	7008044	1				1	1	1	1		
		Air Filter Engine Outer	7008043	1				1	1	1	1		
		Air Filter Cabin	7176099					2	2	2	2		
		Engine Oil filter	6678233	1	1	1	1	1	1	1	1		
		Fuel Filter with Watter Seperator	6667352	1	1	1	1	1	1	1	1		
		Hydraulic Filter Main	7414582	1							1		
		Hydraulic Charge Filter – spin-on	7319444				1			1	1		
		Hydraulic Charge Filter – canister	6692337			1		1	1				
		S650	A3NV-11001 A3NW-11001 B4SZ-11001	Hydraulic Filter Element	7012314					1	1		
				Hydraulic Filter Tank	7002734					1			
				T650	A3P0-11001 A3P1-11001	Belt – Alternator	7142000				1	1	1
		Belt – Drive	7188792						1	1	1	1	
		Hydraulic Oil Filter Canyster Cover	7349796				1	1	1	1			
		Hydraulic Reservoir Breather Cap	6727475			1	1	1	1	1			
		Filter O-ring – top	7015488				1	1					
		Filter O-ring – bottom	7015489				1	1					
		KIT PART NUMBER		7416332	7416333	7416334	7416335	7416336	7416337	7416338	7416339		
		KIT NOTE				Canister Filter S/N A3NT11001 – A3NT11547 S/N A3NV11001 – A3NV1444 S/N A3P011001 – A3P01190	Spin-On Filter S/N A3NT17925 – A3NT18123 S/N A3NV25150 – A3NV25272 S/N A3P018332 – A3P019133	Canister Filter S/N A3NT1001 – A3NT11547 S/N A3NV11001 – A3NV1444	Canister Filter S/N A3NT11548 – A3NT17924 S/N A3NV11445 – A3NV25149	Spin-On Filter S/N A3NT17925 – A3NT18123 S/N A3NV25150 – A3NV25272 S/N A3P018332 – A3P019133	Spin-On Filter S/N A3NT18124 & Above S/N A3NV25273 & Above S/N A3P019134 & Above		
						Canister Filter S/N A3NT11548 – A3NT17924 S/N A3NV11445 – A3NV25149 S/N A3P011191 – A3P018331	Spin-On Filter S/N A3NT18124 & Above S/N A3NV25273 & Above S/N A3P019134 & Above	Canister Filter S/N A3P011001 – A3P011190 S/N A3P011191 – A3P018331			Spin-On Filter S/N B4SY11001 & Above S/N B4SZ11001 & Above		

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR LOADERS					
					250 HR	500 HR	1000 HR			
S630 S650 T650	B2L5-11001	Air Filter Engine Inner	7221934	1			1			
		Air Filter Engine Outer	7286322	1			1			
		Air Filter Cabin	7176099				2			
		Engine Oil filter	7012303	1		1	1			
		Fuel Filter	7023589	1		1	1			
		Hydraulic Filter Main	7414582	1			1			
			Hydraulic Charge Filter	7319444	1		1	1		
			Hydraulic Filter Element	7012314				1		
			Belt – A/C	7178328				1		
			Belt – Alternator	7177784				1		
			Belt – Drive	7177671				1		
			Hydraulic Oil Filter Canister Cover	7349796			1	1		
			Hydraulic Reservoir Breather Cap	6727475				1		
			KIT PART NUMBER		7416340		7416329	7416342		
S770 T770 S850	A3P4-11001 A3P5-11001	Air Filter Engine Inner	7010031	1			1	1	1	
		Air Filter Engine Outer	7286652	1			1	1	1	
		Air Filter Cabin	7176099				2	2	2	
		Engine Oil filter	6678233	1	1	1	1	1	1	
		Fuel Filter with Watter Seperator	6667352	1	1	1	1	1	1	
		Hydraulic Filter Main	7414582						1	
			Hydraulic Charge Filter – spin-on	7319444			1	1	1	
			Hydraulic Charge Filter – canister	6692337	1		1			
			Hydraulic Filter Element	7012314	1			1		
			Belt – A/C	7174707				1	1	
			Belt – Alternator	7174706				1	1	
			Belt – Drive	7197894				1	1	
			Hydraulic Oil Filter Canyster Cover	7349796				1	1	
			Hydraulic Reservoir Breather Cap	6727475			1	1	1	
		Hydraulic Oil Canister Cover	7024038					1		
		KIT PART NUMBER		6987750	7416333	7416334	7416335	7416345	7416346	7416347
		KIT NOTE			Canister Filter	Spin-On Filter	Canister Filter	Spin-On Filter S/N A3P413516 – A3P413656 S/N A3P814128 – A3P814204 S/N ACS712905 – ACS713190	Spin-On Filter S/N A3P413657 & Above S/N A3P814205 & Above S/N ACS713191 & Above	

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT		MAINTENANCE KIT FOR LOADERS					
						250 HR		500 HR		1000 HR	
S770	B3BV-11001	Air Filter Engine Inner	7010031	1	1				1	1	
		Air Filter Engine Outer	7286652	1	1				1	1	
		Air Filter Cabin	7176099						2	2	
		Engine Oil filter	7012303	1	1	1	1		1	1	
		Fuel Filter	7023589	1	1	1	1		1	1	
	S850	B3BY-11001	Fuel Filter	7336334							
			Hydraulic Filter Main	7414582	1	1				1	1
	T770	B3BW-11001	Hydraulic Charge Filter	7319444	1	1	1	1		1	1
			Belt – Alternator	7201422						1	1
	T870	B3BZ-11001 B47L-11001	Belt – Alternator	7185269						1	1
Belt – Drive			7201345						1	1	
Hydraulic Oil Filter Canister Cover			7349796						1	1	
Hydraulic Reservoir Breather Cap			6727475			1	1		1	1	
KIT PART NUMBER					7267108	7429174		7416329	7429178	7416348	7429179
KIT NOTE	B3BV1001 – B3BV12116 B3BY1001 – B3BY11781 B3BW1001 – B3BW13848 B47L1001 – B47L11699	B3BV12117 & Above B3BY11782 & Above B3BW13849 & Above B47L11701 & Above	B3BV1001 – B3BV12116 B3BY1001 – B3BY11781 B3BW1001 – B3BW13848 B47L1001 – B47L11699	B3BV12117 & Above B3BY11782 & Above B3BW13849 & Above B47L11701 & Above	B3BV1001 – B3BV12116 B3BY1001 – B3BY11781 B3BW1001 – B3BW13848 B47L1001 – B47L11699	B3BV12117 & Above B3BY11782 & Above B3BW13849 & Above B47L11701 & Above	B3BV1001 – B3BV12116 B3BY1001 – B3BY11781 B3BW1001 – B3BW13848 B47L1001 – B47L11699	B3BV12117 & Above B3BY11782 & Above B3BW13849 & Above B47L11701 & Above			
T870	B47H-11001	Air Filter Engine Inner	7010031	1					1		
		Air Filter Engine Outer	7286652	1					1		
		Air Filter Cabin	7176099						2		
		Engine Oil filter	6678233	1	1	1			1		
		Fuel Filter with Watter Seperator	6667352	1	1	1			1		
		Hydraulic Filter Main	7414582	1					1		
		Hydraulic Charge Filter	7319444	1		1			1		
		Belt – A/C	7174707						1		
		Belt – Alternator	7174706						1		
		Belt – Drive	7177671						1		
		Hydraulic Oil Filter Canister Cover	7349796						1		
		Hydraulic Reservoir Breather Cap	6727475			1			1		
		KIT PART NUMBER		7416349	7416333	7416335	7416351				

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT		MAINTENANCE KIT FOR LOADERS						
						250 HR		500 HR		1000 HR		
A770	B3BU-11001	Air Filter Engine Inner	7010031	1	1						1	1
		Air Filter Engine Outer	7286652	1	1						1	1
		Air Filter Cabin	7176099								2	2
		Engine Oil filter	7012303	1	1	1	1	1	1	1	1	1
		Fuel Filter	7023589	1		1		1			1	
		Fuel Filter	7336334				1					
		Hydraulic Filter Main	7414582	1	1				1			1
		Hydraulic Charge Filter	7319444	1	1			1			1	1
		Belt – Alternator	7185269						1		1	1
		Belt – Drive	7201345							1	1	1
		Hydraulic Oil Filter Canister Cover	7349796									
		Hydraulic Reservoir Breather Cap	6727475					1			1	1
		Steering filter	6679143					1	1		1	1
		KIT PART NUMBER				7267108	7429174	7416350	7429175	7416343	7429176	7416344
KIT NOTE				SN B3BU1001 – B3BU11918	SN B3BU11919 & Above	SN B3BU1001 – B3BU11918	SN B3BU11919 & Above	SN B3BU1001 – B3BU11918	SN B3BU11919 & Above	SN B3BU1001 – B3BU11918	SN B3BU11919 & Above	





FOR EXCAVATORS

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR EXCAVATORS		
					250 HR	500 HR	1000 HR
E08	A4BP-11001 B4PC-11001	Air Filter Engine Inner	6673753	1			1
		Air Filter Engine Outer	6673752	1			1
E10	A33P-11001 B4PD-11001	Engine Oil Filter	6671057	1		1	1
		Fuel Filter with Watter Seperator	6667352	1		1	1
		Hydraulic Filter Main	6653336	1		1	1
		Belt – Alternator	6808629				1
		Hydraulic Reservoir Breather Cap	6727475			1	1
KIT PART NUMBER				6901188		7416148	7416149
E14	AHNM-11001	Air Filter Engine Inner	6673753	1			1
		Air Filter Engine Outer	6673752	1			1
E16	AHLL-11001	Engine Oil Filter	6671057	1		1	1
		Fuel Filter with Watter Seperator	6667352	1		1	1
		Hydraulic Filter Main	6653336	1		1	1
		Belt – Alternator	6808629				1
		Hydraulic Reservoir Breather Cap	6692836			1	1
KIT PART NUMBER				6901188		7416190	7416193
E17	B27H-11001 B4PJ-11001	Air Filter Cabin	7176099	1			1
		Air Filter Engine Inner	6673753	1			1
E19	AWMM-11001 B4PK-11001	Air Filter Engine Outer	6673752	1			1
		Engine Oil Filter	6671057	1		1	1
E20	AWRH-11001	Fuel Prefilter	6683101	1			1
		Fuel Filter with Watter Seperator	6667352	1		1	1
E20Z	B4PH-11001	Hydraulic Filter Main	6661248	1		1	1
		Belt – Fan	7227648				1
		Hydraulic Reservoir Breather Cap	6692836			1	1
KIT PART NUMBER				7256941		7416150	7416151
E17z Canopy	B4PF-11001	Air Filter Engine Inner	6673753	1			1
		Air Filter Engine Outer	6673752	1			1
E17z	B4AW-11001	Engine Oil Filter	6671057	1		1	1
		Fuel Prefilter	6683101	1			1
		Fuel Filter with Watter Seperator	6667352	1		1	1
		Hydraulic Filter Main	6661248	1		1	1
		Belt – Fan	7227648				1
		Hydraulic Reservoir Breather Cap	6692836			1	1
KIT PART NUMBER				7294827		7416150	7416152
E25	AB8B-11001	Air Filter Cabin	7176099				1
		Air Filter Cabin Recirculating	7222791				1
		Air Filter Engine Inner	6673753	1			1
		Air Filter Engine Outer	6673752	1			1
		Engine Oil Filter	6657635	1	1	1	1
		Fuel Filter with Watter Seperator	6667352	1	1	1	1
		Hydraulic Filter Case Drain	7009365	1		1	1
		Hydraulic Filter Main	6661248	1		1	1
		Belt – Fan	7193802				1
		Hydraulic Reservoir Breather Cap	6692836			1	1
KIT PART NUMBER				6987753	7416153	7416154	7416155

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR EXCAVATORS		
					250 HR	500 HR	1000 HR
E26	ACRA-11001	Air Filter Cabin	7010331				1
		Air Filter Cabin Recirculating	7010332				1
		Air Filter Engine Inner	6673753	1			1
		Air Filter Engine Outer	6673752	1			1
		Engine Oil Filter	6657635	1	1	1	1
		Fuel Filter with Watter Seperator	6667352	1	1	1	1
		Hydraulic Filter Case Drain	7009365	1		1	1
		Hydraulic Filter Main	6661248	1		1	1
		Belt – Fan	7193802				1
		Hydraulic Reservoir Breather Cap	6692836			1	1
		KIT PART NUMBER		6987753	7416153	7416154	7416156
E26 E27Z	B4B8-11001 B4B8-13375	Air Filter Cabin	7176099				1
		Air Filter Cabin Recirculating	7222791				1
		Air Filter Engine Inner	6673753	1			1
		Air Filter Engine Outer	6673752	1			1
		Engine Oil Filter	6657635	1	1	1	1
	B4B9-11001 B4B9-13375	Fuel Prefilter	6683101				1
		Fuel Filter with Watter Seperator	6667352	1	1	1	1
		Hydraulic Filter Case Drain	7009365	1		1	1
		Hydraulic Filter Main	6661248	1		1	1
		Belt – Drive	7310236				1
Hydraulic Reservoir Breather Cap	7024201			1	1		
		KIT PART NUMBER		6987753	7416153	7416161	7416157
E27	B4BA-11001 B4BA-13375	Air Filter Cabin	7176099				1
		Air Filter Cabin Recirculating	7222791				1
		Air Filter Engine Inner	6673753	1			1
		Air Filter Engine Outer	6673752	1			1
		Engine Oil Filter	6657635	1	1	1	1
		Fuel Prefilter	6683101				1
		Fuel Filter with Watter Seperator	6667352	1	1	1	1
		Hydraulic Filter Case Drain	7009365	1		1	1
		Hydraulic Filter Main	6661248	1		1	1
		Belt – Drive	7302139				1
Hydraulic Reservoir Breather Cap	7024201			1	1		
		KIT PART NUMBER		6987753	7416153	7416161	7416158
E32 E35	AC2N-11001	Air Filter Cabin	7176099				1
		Air Filter Cabin Recirculating	7222791				1
		Air Filter Engine Inner	6672468	1			1
		Air Filter Engine Outer	6672467	1			1
		Engine Oil Filter	6675517	1		1	1
		Fuel Filter with Watter Seperator	6667352	1		1	1
	AC2P-11001	Hydraulic Filter Case Drain	7009365	1		1	1
		Hydraulic Filter Main	6668819	1		1	1
		Belt – A/C	7009797				1
		Belt – Alternator W/O HVAC	7009796				1
		Belt – Fan	7009795				1
		Hydraulic Reservoir Breather Cap	6692836			1	1
		KIT PART NUMBER		6987645	7416159	7416160	

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR EXCAVATORS		
					250 HR	500 HR	1000 HR
E32 E35	B3CS-11001	Air Filter Cabin	7176099				1
		Air Filter Cabin Recirculating	7222791				1
		Air Filter Engine Inner	6672468	1			1
		Air Filter Engine Outer	6672467	1			1
		Engine Oil Filter	6675517	1		1	1
	B3GR-11001	Fuel Filter with Watter Seperator	6667352	1		1	1
		Hydraulic Filter Case Drain	7009365	1		1	1
		Hydraulic Filter Main	6668819	1		1	1
		Belt – A/C	7261350				1
		Belt – Alternator W/O HVAC	7261349				1
		Belt – Fan	7261348				1
		Hydraulic Reservoir Breather Cap	6692836			1	1
KIT PART NUMBER			6987645		7416159	7416354	
E34 E35Z	B3Y3-11001	Air Filter Cabin	7176099	1			1
		Air Filter Cabin Recirculating	7222791				1
		Air Filter Engine Inner	6672468	1			1
		Air Filter Engine Outer	6672467	1			1
		Engine Oil Filter	6675517	1		1	1
	B3Y4-11001	Fuel Prefilter	6683101	1			1
		Fuel Filter with Watter Seperator	6667352	1		1	1
		Hydraulic Filter Case Drain	7009365	1		1	1
		Hydraulic Filter Main	6668819	1		1	1
		Belt – A/C	7009797				1
		Belt – Alternator	7009796				1
		Belt – Fan	7359022				1
		Hydraulic Reservoir Breather Cap	6692836			1	1
		KIT PART NUMBER			7359789		7416159
E45	AHHC-11001	Air Filter Cabin	7176099				1
		Air Filter Cabin Recirculating	7222791				1
		Air Filter Engine Inner	6666376	1			1
		Air Filter Engine Outer	6666375	1			1
		Engine Oil Filter	6675517	1		1	1
	B3NR-11001	Fuel Filter with Watter Seperator	6667352	1		1	1
		Hydraulic Filter Case Drain	6516722	1		1	1
		Hydraulic Filter Main	6668819	1		1	1
		Belt – A/C	7010252				1
		Belt – Fan	7010894				1
		Hydraulic Reservoir Breather Cap	6692836			1	1
		KIT PART NUMBER			6987751		7416163

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR EXCAVATORS		
					250 HR	500 HR	1000 HR
E50 E55	AHHE-11001 B3NS-11001	Air Filter Cabin	7176099			1	
		Air Filter Cabin Recirculating	7222791			1	
		Air Filter Engine Inner	6666376	1		1	
		Air Filter Engine Outer	6666375	1		1	
		Engine Oil Filter	6675517	1	1	1	
	ASW3-11001 B3NT-11001	Fuel Filter with Watter Seperator	6667352	1	1	1	
		Hydraulic Filter Case Drain	6516722	1	1	1	
		Hydraulic Filter Main	6670207	1	1	1	
		Belt – A/C	7010252			1	
		Belt – Fan	7010894			1	
Hydraulic Reservoir Breather Cap	6692836		1	1			
KIT PART NUMBER			6987752		7416165	7416166	
E55W	AEFB-11001	Air Filter A/C	7006085	1		1	
		Air Filter Engine Inner	6666334	1		1	
		Air Filter Engine Outer	6666333	1		1	
		Engine Oil Filter	7025590	1	1	1	
		Fuel Prefilter	7013148	1	1	1	
		Fuel Filter	7010351	1	1	1	
		Hydraulic Breather Filter S/N AEFB10001 – AEFB11229	7318870	1		1	
		Hydraulic Breather Filter S/N AEFB11230 & Above	7276395	1		1	
		Hydraulic Filter Pilot	7275347	1	1	1	
		Hydraulic Filter Return	7004883	1	1	1	
		Belt – A/C	7005577			1	
		Belt – Water Pump	7004451			1	
KIT PART NUMBER			6987573		7416167	7416168	
E57W	B3WU-11001	Air Filter A/C	7287679	1		1	
		Air Filter Engine Inner	7287668	1		1	
		Air Filter Engine Outer	7287669	1		1	
		Engine Oil Filter	7012303	1	1	1	
		Fuel Filter S/N B3WU11001 – B3WU11510	7287671	1			
		Fuel Filter S/N S/N B3WU11511 & Above	7312065		1	1	
		Fuel Filter S/N B3WU12305 & Above	7287488	1	1	1	
		Hydraulic Breather Filter	7276395			1	
		Hydraulic Filter Element	7287681			1	
		Hydraulic Filter Pilot	7275347		1	1	
		Hydraulic Filter Return	7287670			1	
		Belt – A/C	7287323			1	
		Belt – Water Pump	7287324			1	
KIT PART NUMBER			7301116		7416169	7416170	

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR EXCAVATORS		
					250 HR	500 HR	1000 HR
E60	AET8-11001	Air Filter A/C	7006085	1			1
		Air Filter Engine Inner	6666334	1			1
		Air Filter Engine Outer	6666333	1			1
		Engine Oil Filter	7025590	1		1	1
		Fuel Prefilter	7013148	1			1
		Fuel Filter	7010351	1		1	1
		Hydraulic Breather Filter S/N AET810001 – AET811749	7318870	1		1	1
		Hydraulic Breather Filter S/N AET811750 & Above	7276395	1		1	1
		Hydraulic Filter Pilot	7275347	1			1
		Hydraulic Filter Return	7004883	1		1	1
		Belt – A/C	7005577				1
		Belt – Fan	7004452				1
		Strainer – Hydraulic Tank	7006810				1
		KIT PART NUMBER				6987573	7416171
E62	B34P11001 to B34P11355	Air Filter A/C	7006085	1			1
		Air Filter Engine Inner	6666334	1			1
		Air Filter Engine Outer	6666333	1			1
		Engine Oil Filter	7025590	1		1	1
		Fuel Prefilter	7013148	1			1
		Fuel Filter	7010351	1		1	1
		Hydraulic Breather Filter	7318870	1		1	1
		Hydraulic Breather Filter	7276395	1		1	1
		Hydraulic Filter Pilot	7275347	1			1
		Hydraulic Filter Return	7004883	1		1	1
		Belt – A/C	7005577				1
		Belt – Fan	7010300				1
		Strainer – Hydraulic Tank	7006810				1
		KIT PART NUMBER				6987573	7416171
E80	AET3-11001	Air Filter A/C	7006085	1			1
		Air Filter Engine Inner	6666334	1			1
		Air Filter Engine Outer	6666333	1			1
		Engine Oil Filter	7025590	1		1	1
		Fuel Prefilter	7013148	1		1	1
		Fuel Filter	7010351	1		1	1
		Hydraulic Breather Filter S/N AET310001 – AET312910	7318870	1			1
		Hydraulic Breather Filter S/N AET312911 & Above	7276395	1			1
		Hydraulic Filter Pilot	7275347	1			1
		Hydraulic Filter Return	7004884	1		1	1
		Belt – A/C	7005577				1
		Belt – Fan	7004452				1
		Strainer – Hydraulic Tank	7006811				1
		KIT PART NUMBER				6987575	7416174

MODEL	MACHINE S/N START	COMPONENT DESCRIPTION	COMPONENT PART NUMBER	FILTER KIT	MAINTENANCE KIT FOR EXCAVATORS		
					250 HR	500 HR	1000 HR
E85	B34S-11001	Air Filter A/C	7006085	1			1
		Air Filter Engine Inner	6666334	1			1
		Air Filter Engine Outer	6666333	1			1
		Engine Oil Filter	7025590	1	1		1
		Fuel Prefilter	7029012	1	1		1
		Fuel Filter	7029016	1	1		1
		Hydraulic Breather Filter B34S11001 – B34S12014, B34S13467 & Above	7318870	1			1
		Hydraulic Breather Filter S/N B34S12015–B34S13466	7276395				1
		Hydraulic Filter Pilot	7275347	1			1
		Hydraulic Filter Return	7004884	1	1		1
		Belt – A/C	7005577				1
		Belt – Fan	7004452				1
		Strainer – Hydraulic Tank	7006811				1
KIT PART NUMBER			7031399		7416180		7416181





FOR TELEHANDLERS

MODEL	MACHINE S/N START	PART DESCRIPTION	PART NUMBER	MAINTENANCE & FILTER KITS FOR TELEHANDLERS					
				KIT FILTER		500 HR		1000 HR	
TL470	B35F11001 & Above B35G11001 & Above B35B11001 & Above B35C11001 & Above	Air Filter Inner	6910726	1	1			1	1
		Air Filter Outer	6910725	1	1			1	1
		Cab filter	7146967					1	1
		Drive belt – air conditions	7168236					1	1
		Drive belt – alternator	7028327					1	1
		Drive belt – tensioner	7028326					1	1
		Drive belt – tensioner	7028334					1	1
		Engine Oil Filter	7028298	1	1	1	1	1	1
		Fuel Filter	7028353	1	1			1	1
		Fuel Prefilter	7028352	1	1			1	1
		Hydraulic / Hydrostatic Filter	7012477	2	1	2	1	2	1
		Hydraulic / Hydrostatic Filter	7012478	1	1	1	1	1	1
		Hydraulic Reservoir Breather Cap	6727475			1	1	1	1
		Seal kit	7027473	1	1	1	1	1	1
		Seal kit	7027474	1	1	1	1	1	1
KIT PART NUMBER				7433252	7433254	7433244	7433246	7433248	7433250
KIT NOTE				B35F11001 & Above B35G11001 & Above	B35B11001 & Above B35C11001 & Above	B35F11001 & Above B35G11001 & Above	B35B11001 & Above B35C11001 & Above	B35F11001 & Above B35G11001 & Above	B35B11001 & Above B35C11001 & Above
TL4180 TL358	B33J11001 & Above B33G11001 & Above B3G511001 & Above B3GJ11001 & Above	Air Filter Inner	6910726	1	1			1	1
		Air Filter Outer	6910725	1	1			1	1
		Cab filter	7228497					1	1
		Drive belt – air conditions	7168236					1	1
		Drive belt – alternator	7028327					1	
		Drive belt – alternator	7173125						1
		Drive belt – tensioner	7028326					1	
		Drive belt – tensioner	7028334					1	
		Engine Oil Filter	7028298	1		1		1	
		Engine Oil Filter	960698			1		1	1
		Fuel Filter	7028353	1				1	
		Fuel Filter	6911907			1			1
		Fuel Prefilter	7028352	1				1	
		Fuel Prefilter	7251998			1			1
		Hydraulic / Hydrostatic Filter	7225338	1	1	1	1	1	1
Hydraulic Reservoir Breather Cap	6727475			1	1	1	1		
KIT PART NUMBER				7433253	7433284	7433245	7433247	7433247	7433251
KIT NOTE				B33J11001 & Above B3G511001 & Above B3GJ11001 & Above	B33G11001 & Above	B33J11001 & Above B3G511001 & Above B3GJ11001 & Above	B33G11001 & Above	B33J11001 & Above B3G511001 & Above B3GJ11001 & Above	B33G11001 & Above

MODEL	MACHINE S/N START	PART DESCRIPTION	PART NUMBER	MAINTENANCE & FILTER KITS FOR TELEHANDLERS					
				KIT FILTER		500 HR		1000 HR	
TL26.60	B4ZN11001 & Above B4ZR11001 & Above	A/C receiver drier filter	6674235						
		Air Filter Cabin	7228497					1	
		Air Filter Engine Inner	7010031	1				1	
		Air Filter Engine Outer	7286652	1				1	
		Engine Oil Filter	7343102	1		1		1	
TL30.60	B4ZJ11001 & Above B4ZP11001 & Above	Fuel Filter, Pre Filter	7348032	1				1	
		Fuel Filter Main	7336334	1				1	
		Fuel Tank Breather	7373582					1	
TL30.70	B4ZT11001 & Above B4ZU11001 & Above	Hydraulic Filter Main	7225338	1		1		1	
		Drive belt – air conditions	7168236						
		Drive belt – alternator	7267157						
		Hydraulic Reservoir Breather Cap	6727475			1		1	
		KIT PART NUMBER			7420390		7420391		7420392



GET **A QUOTE**

Simply click the **button** or scan the **QR code** below to access our quote request form.

We will contact you as soon as possible.
Thank you!



REQUEST QUOTE >